

Preliminary

Wideband Power Amplifier

RWM0110050-47



Product Features

- GaN on SiC Broadband High Power Amplifier
- 20 ~ 1000MHz Operation Bandwidth
- Power Gain Typical 47dB.
- 50W Typical. @P_{IN} = 0dBm
- Designed with Class A, AB
- Designed with a compact form factor

Applications

- General Purpose



Description

The power amplifier module is designed for Broadcasting, Telecommunication, Medical and Other markets.

Operating frequency range is from 20 ~ 1000MHz.

Gallium Nitride on SiC technology is used and attached on an aluminum sub carrier. Full in/out matching for broadband performance is already applied.

Improved thermal handling by patented technology.

Electrical Specifications @ V_{CC} = 32V; T_c = 45°C; Z_s = Z_L = 50Ω

PARAMETER		UNIT	MIN	TYP	MAX	CONDITION
Operating Frequency		MHz	20	-	1000	-
Small Signal Gain		dB	-	55.0	-	@P _{IN} = -30dBm
Power Gain		dB	-	47.0	-	@P _{IN} = 0dBm
Gain Flatness		dBpp	-	±1.0	±1.5	@P _{IN} = 0dBm
P _{OUT}		dBm	46.0	47.0	-	@P _{IN} = 0dBm
OIP3 @ P _o = +37dBm/Tone (100kHz spacing, CW 2-Tone)		dBm	48	52	-	-
Input Return Loss		dB	-	-15	-9.5	-
Harmonic suppression	2 nd	dBc	-	-35	-20	CW 1-tone @P _o = +43dBm
	3 rd	dBc	-	-25	-10	
Noise Figure		dB		8.0		-
Supply Voltage		V		32.0		V _{cc} (=V _{ds})
Quiescent Current consumption		A		1.8	2.2	-
Current Consumption		A	-	3.8	4.4	@P _{IN} = 0dBm
Switch On/Off – PIN No 4. Switching Time*		uS	-	3	5	
Shut Down(+5V) – PIN No 3. Switching Time		mS	-	500	-	Mute
Shut Down or Switch On/Off TTL Voltage		V	0	-	0.5	On : TTL "Low"(Enable)
			2.5	5	5.5	Off : TTL "High"(30mA@Disable)

Note.

*. Gate On/Off : High speed switching

Preliminary
Wideband Power Amplifier
RWM0110050-47



Absolute Maximum Ratings

PARAMETER	UNIT	RATING
Input RF Power	dBm	2
Supply Voltage	V	36.0
Load Mismatch Value	-	3 : 1 @all load phase

* Input Signal Condition : CW 1-Tone

Environmental Characteristics

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Case Temperature	°C	-20	-	70	Tc
Storage Temperature	°C	-40	-	85	Tstg
Relative Humidity	%			95	RH

Ordering Information

Part Number	Package
RWM0105050-47	Connector : D-Sub(7W2), SMA Type

Mechanical Specifications

PARAMETER	UNIT	TYP
Dimension	mm	117.5(L) x 75(W) x 25(H)
Weight	g	380
RF IN/OUT Connector	-	SMA Female
Cooling	-	External Heat-sink

Preliminary
Wideband Power Amplifier
RWM0110050-47



Typical Performance @ 45°C

Frequency (MHz)	RF Input Power (dBm)	RF Output Power (dBm)	RF Output Power (W)	Power Gain (dB)	Current Consumption (A)	Supply Voltage (V)	Efficiency (%)
20	0	45.76	37.67	45.76	2.66	28.00	50.58
100		47.09	51.17	47.09	3.34	28.00	54.71
200		46.56	45.29	46.56	3.63	28.00	44.56
300		46.97	49.77	46.97	3.95	28.00	45.00
400		47.33	54.08	47.33	4.07	28.00	47.45
500		47.02	50.35	47.02	3.73	28.00	48.21
600		46.69	46.67	46.69	3.97	28.00	41.98
700		45.86	38.55	45.86	3.45	28.00	39.90
800		46.11	40.83	46.11	3.07	28.00	47.50
900		45.92	39.08	45.92	3.18	28.00	43.89
1000		46.05	40.27	46.05	3.69	28.00	38.98

Frequency (MHz)	RF Input Power (dBm)	RF Output Power (dBm)	RF Output Power (W)	Power Gain (dB)	Current Consumption (A)	Supply Voltage (V)	Efficiency (%)
20	0	46.67	46.45	46.67	2.92	32.00	49.71
100		47.89	61.52	47.89	3.62	32.00	53.11
200		47.26	53.21	47.26	3.82	32.00	43.53
300		47.60	57.54	47.60	4.16	32.00	43.23
400		47.89	61.52	47.89	4.28	32.00	44.92
500		47.63	57.94	47.63	3.91	32.00	46.31
600		47.40	54.95	47.40	4.15	32.00	41.38
700		46.81	47.97	46.81	3.67	32.00	40.85
800		47.04	50.58	47.04	3.30	32.00	47.90
900		46.73	47.10	46.73	3.38	32.00	43.54
1000		46.63	46.03	46.63	3.78	32.00	38.05


< Table 1. Typical Performance (28 Vs 32 VDC) >

Preliminary
Wideband Power Amplifier
RWM0110050-47



Frequency (MHz)	Harmonic @43dBm 2nd [dBc]	Harmonic @43dBm 3rd [dBc]	IMD @37dBm/tone (dBc)	OIP3 @37dBm/tone (dBm)	Noise Figure (dB)
20	-25	-16	25	52.5	9.7
100	-35	-19	25	52.5	7.7
200	-36	-14	26	53.0	7.1
300	-39	-19	27	53.5	6.7
400	-28	-26	27	53.5	6.6
500	-33	-26	26	53.0	6.9
600	-31	-32	25	52.5	6.9
700	-33	-34	24	52.0	6.9
800	-59	-42	24	52.0	7.0
900	-38	-52	24	52.0	6.8
1000	-32	-51	25	52.5	7.2

< Table 2. Typical Performance >

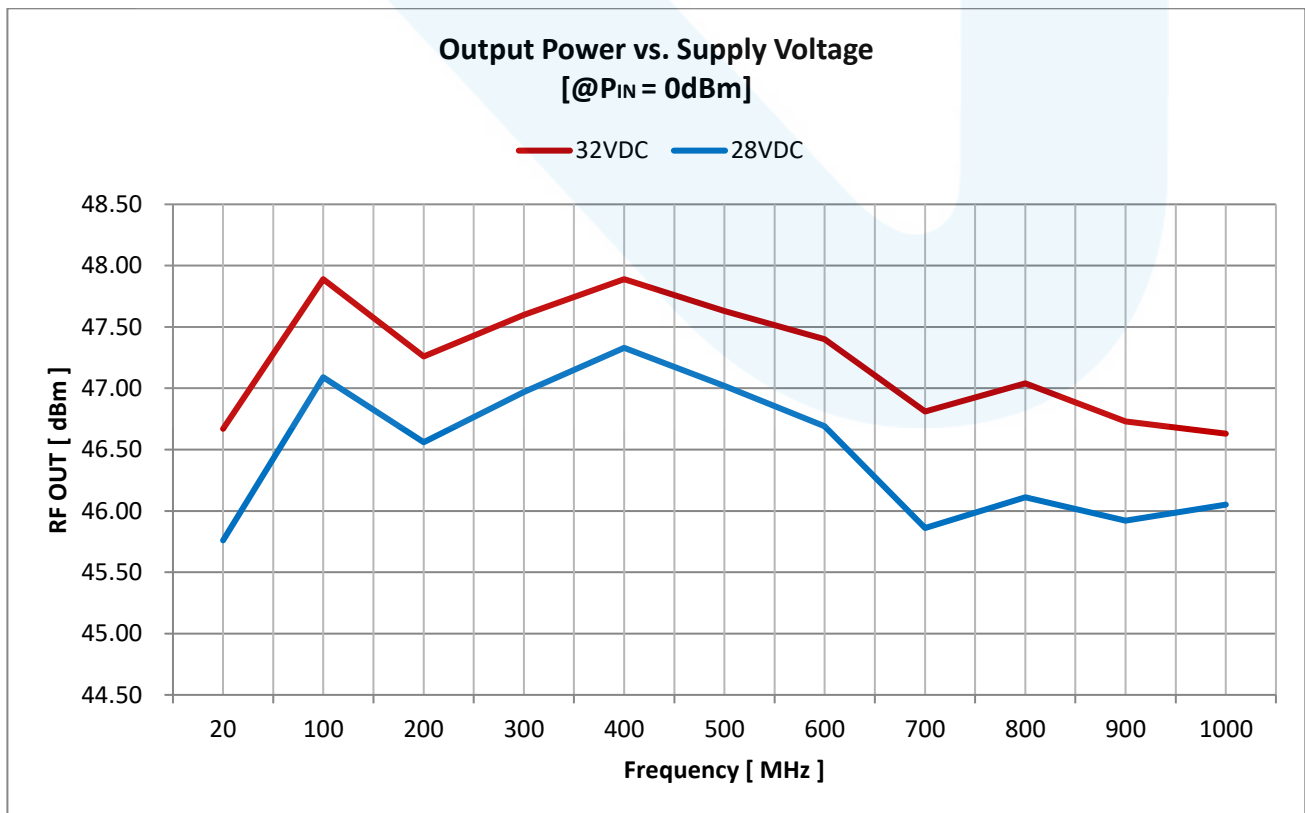


< Chart 1. Typical Performance (RF OUT : 28 Vs 32 VDC) >

Preliminary
Wideband Power Amplifier
RWM0110050-47



Package Dimensions

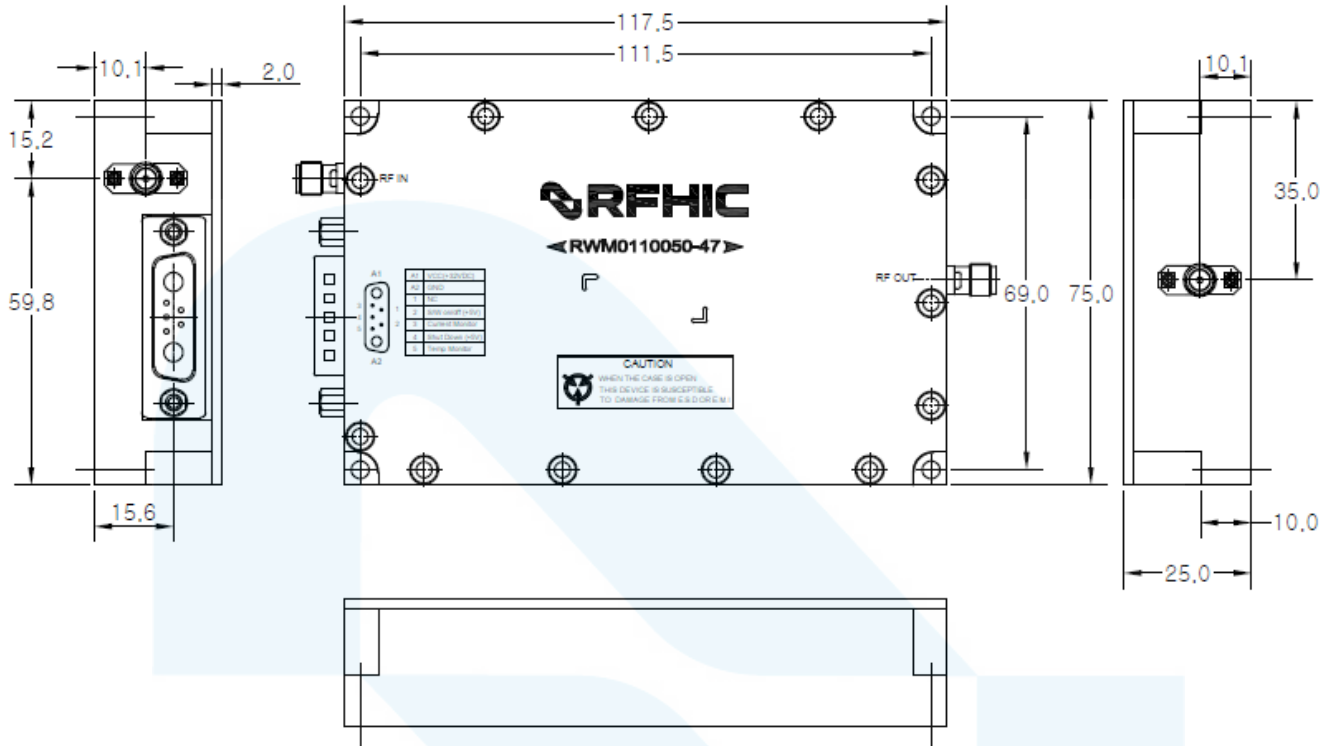

Type1. SMA Connectorized Module [With D-SUB 7W2 male Type]

Pin Description (7W2 / D-SUB / Male type)			
Pin No	Description	I/O	Specifications
A1	Vcc	I	+32VDC
A2	GND	I	Ground
1	NC	-	OPEN
2	S/W On/off (+5V)*	I	Enable : TTL "Low", Disable : TTL "High" (Low : 0 ~ 0.5V, High : 2.5 ~ 5V)
3	Current Monitor	O	Reference voltage : 500mV @ 0A Analog voltage relative to IDD @20mV / 100mA
4	Shut Down (+5V)*	I	Enable : TTL "Low", Disable : TTL "High" (Low : 0 ~ 0.5V, High : 2.5 ~ 5V)
5	Temp Monitor	O	Reference voltage : 750mV @ 25°C, Scale : 10mV/°C

*. Internal pull-down resistor included

Preliminary
Wideband Power Amplifier
RWM0110050-47



Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RWM0110050-47	2026.04.15	0.1	Preliminary	-



Certification

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhic.com/rfhic-us/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>